

Software Trigger USB2.0

Color / Monochrome SXGA CCD Camera

STC-TC152USB-AT/AS/BTC/BSC

STC-TB152USB-AT/AS/BTC/BSC

Product Specifications

Sensor Technology Co., Ltd

Caution for the PC with the Intel Core i3, i5 or i7

When use the USB camera with some PC, which has the Intel Core i3, i5 or i7, may occur following issue:

CANNOT get any image from the USB camera.

Frame drops frequently

(This issue may occurred for the other manufacture USB camera too)

Cause of this issue:

The image data cannot transfer to the PC because the Intel Core i3, i5 or i7 CPU switch to the power save mode frequently while the image is transferring.

Solution for this issue:

1. Disable the power save mode with the Sentech PC power management software.

The power save mode can disable with the Sentech PC power management software "StPowerCtrl".

Please contact to the Sales representative about this software.

The power consumption and the heat of the PC are increased when disable the power save mode. Please understand and accept this before disable the power save mode.

2. Disable the power save mode with change the BIOS settings.

Please change BIOS setting with your responsibility.

The power consumption and the heat of the PC are increased when disable the power save mode. Please understand and accept this before disable the power save mode.

3. Change the camera clock from "Normal" to "1/2" or "1/4". (Reduce the frame rate)

Note.

All specifications are subject to change without prior notice.

Revisions

Rev	Date	Changes	Note
1.0	2008/03/26	New document	
1.1	2009/03/31	Update Specifications update (Trigger mode) Add Pulse width trigger for the trigger mode Add Start & stop trigger for the trigger mode Add board type for Specifications Add Connector specifications (Board type) Add Input/Output signals specifications (Board type)	
1.2	2009/05/08	Update Electronic specifications (Change the minimum illumination)	
1.3	2009/08/07	Update Page number	
1.4	2010/08/06	Update Add the caution for the USB device	
1.5	2010/10/04	Update Electronic specifications (Add clock speed (1/2 and 1/4 clock)) Environmental specifications (Delete humidity) Input / Output signals specifications (Board type) (Add time for the pulse width)	
1.6	2010/11/05	Update Electronic specifications (Add shutter speed range)	
1.7	2011/03/02	Update Add the Caution for the PC with the Intel Core i series chipset Add the spectral sensitivity characteristics	
1.8	2011/06/17	Update Change the Caution for the PC with the Intel Core i3, i5 and i7 Add the I/O circuits	
1.9	2011/07/04	Update Electronic specifications (Revise the resolution)	

Index

Specifications	5
Electronic specifications / Mechanical specifications / Environmental specifications	5
(STC-TC152USB-A/TB152USB-A: case type)	5
(STC-TC152USB-B/TB152USB-B: board type)	6
Connector specifications (Board type)	8
Input / Output Signals specifications (Board type)	9
Dimensions	13
Dimensions (STC-TC152USB-AT: Color / right-angle / case type)	13
Dimensions (STC-TC152USB-AS: Color / straight / case type)	13
Dimensions (STC-TC152USB-BTC: Color / right-angle / C mount / board type)	14
Dimensions (STC-TC152USB-BSC: Color / straight / C mount / board type)	14
Dimensions (STC-TB152USB-AT: Monochrome / right-angle / case type)	15
Dimensions (STC-TB152USB-AS: Monochrome / straight / case type)	15
Dimensions (STC-TB152USB-BTC: Monochrome / right-angle / C mount / board type)	16
Dimensions (STC-TB152USB-BSC: Monochrome / straight / C mount / board type)	16

Specifications

Electronic specifications / Mechanical specifications / Environmental specifications

(STC-TC152USB-A/TB152USB-A: case type)

Product			STC-TC152USB-AT	STC-TC152USB-AS	STC-TB152USB-AT	STC-TB152USB-AS
Electronic Specifications	Imager		1/2" interline SXGA color progressive CCD: ICX205AK		1/2" interline SXGA monochrome progressive CCD: ICX205AL	
	Total picture elements		1434 (H) x 1050 (V)			
	Effective picture elements		1392 (H) x 1040 (V)			
	Chip size		7.60 (H) x 6.20(V) mm			
	Cell size		4.65 (H) x 4.65 (V) μm			
	Scanning system		Progressive			
	Scanning methods		Full scanning, 1/1 partial scanning, 1/2 partial scanning, 1/4 partial scanning, Variable partial scanning		Full scanning, 1/1 partial scanning, 1/2 partial scanning, 1/4 partial scanning, Variable partial scanning, Binning, Binning 1/1 partial scanning, Binning 1/2 partial scanning, Binning 1/4 partial scanning, Binning variable partial scanning	
	Pixel frequency		36.8181 MHz (Normal) / 18.4090 MHz (1/2 clock) / 9.20453 MHz (1/4 clock)			
	Maximum framer rate	Full scanning	19.26 fps (Normal) / 9.63 fps (1/2 clock) / 4.815 fps (1/4 clock)			
		1/2 partial	38.52 fps (Normal) / 19.26 fps (1/2 clock) / 9.63 fps (1/4 clock)			
		1/4 partial	77.04 fps (Normal) / 38.52 fps (1/2 clock) / 19.26 fps (1/4 clock)			
	Resolution		1360 (H) x 1024 (V) (Full scanning) 1360 (H) x 472 (V) (1/2 partial scanning) 1360 (H) x 176 (V) (1/4 partial scanning)			
	Minimum scene illumination		2.7 Lux at F1.2		0.12 Lux at F1.2	
	Sync. System		Internal			
	Electronic shutter		Auto / Manual (software selectable)			
		Normal	1/36,818,18 to 1/19.26 seconds			
		1/2 clock	1/18,409,091 to 1/9.63 seconds			
		1/4 clock	1/9,204,545 to 1/4.81 seconds			
	Gain		Auto / Manual (software selectable)			
	Gamma		Manual (software selectable)			
	White balance		Auto / Manual / One shot (software selectable)		-	
	Trigger mode		Free-run / Edge preset trigger / Pulse width trigger / Start & stop trigger (software selectable)			
	Input/output		USB2.0 High speed			
	Power	Input voltage	+5 V through USB connector / DC Jack			
		Consumption	Less than 450 mA			
Mechanical Specifications	Dimensions		51 (W) x 51 (H) x 46.1 (D) mm	51 (W) x 51 (H) x 48.8 (D) mm	51 (W) x 51 (H) x 46.1 (D) mm	51 (W) x 51 (H) x 48.8 (D) mm
	Lens mount		C mount			
	Tripod		2 screws on the bottom plate			
	Weight		Approximately 145 g			
Environmental Specifications	Operational temperature		0 to 40 deg. C			
	Storage temperature		-30 to 65 deg. C			
	Vibration		20Hz to 200Hz to 20Hz (5min./cycle), acceleration 10G, 3 directions 30 min. each			
	Shock		Acceleration 70G, half amplitude 6ms, 3 directions 3 times each			
	Standard compliancy		EMS: EN61000-6-2, EMI: EN61000-6-3 (Class B)			
	RoHS		RoHS compliance			

Please use the hardware trigger type USB camera (STC-TC/TB152USB-AH) when the input / output signals including the trigger signal and the strobe signal are required in the system.

(Caution)

Please DO NOT connects or disconnect any USB devices including USB memory while use this USB camera. Its possibility to the USB camera DOES NOT recognize after connect or disconnect USB devices.

(STC-TC152USB-B/TB152USB-B: board type)


Product		STC-TC152USB-BTC	STC-TC152USB-BSC	STC-TB152USB-BTC	STC-TB152USB-BSC	
Electronic Specifications	Imager	1/2" interline SXGA color progressive CCD: ICX205AK		1/2" interline SXGA monochrome progressive CCD: ICX205AL		
	Total picture elements	1434 (H) x 1050 (V)				
	Effective picture elements	1392 (H) x 1040 (V)				
	Chip size	7.60 (H) x 6.20(V) mm				
	Cell size	4.65 (H) x 4.65 (V) μm				
	Scanning system	Progressive				
	Scanning methods	Full scanning, 1/1 partial scanning, 1/2 partial scanning, 1/4 partial scanning, Variable partial scanning		Full scanning, 1/1 partial scanning, 1/2 partial scanning, 1/4 partial scanning, Variable partial scanning, Binning, Binning 1/1 partial scanning, Binning 1/2 partial scanning, Binning 1/4 partial scanning, Binning variable partial scanning		
	Pixel frequency	36.8181 MHz (Normal) / 18.4090 MHz (1/2 clock) / 9.20453 MHz (1/4 clock)				
	Maximum framer rate	Full scanning	19.26 fps (Normal) / 9.63 fps (1/2 clock) / 4.815 fps (1/4 clock)			
		1/2 partial	38.52 fps (Normal) / 19.26 fps (1/2 clock) / 9.63 fps (1/4 clock)			
		1/4 partial	77.04 fps (Normal) / 38.52 fps (1/2 clock) / 19.26 fps (1/4 clock)			
	Resolution	1360 (H) x 1024 (V) (Full scanning) 1360 (H) x 472 (V) (1/2 partial scanning) 1360 (H) x 176 (V) (1/4 partial scanning)				
	Minimum scene illumination	2.7 Lux at F1.2		0.12 Lux at F1.2		
	Sync. System	Internal				
	Electronic shutter	Auto / Manual (software selectable)				
		Normal	1/36,818,18 to 1/19.26 seconds			
		1/2 clock	1/18,409,091 to 1/9.63 seconds			
		1/4 clock	1/9,204,545 to 1/4.81 seconds			
	Gain	Auto / Manual (software selectable)				
	Gamma	Manual (software selectable)				
White balance	Auto / Manual / One shot (software selectable)		-			
Trigger mode	Free-run / Edge preset trigger / Pulse width trigger / Start & stop trigger (software selectable)					
Input/output	USB2.0 High speed					
Power	Input voltage	+5 V through USB connector / DC jack				
	Consumption	Less than 450 mA				
Mechanical Specifications	Dimensions	45 (W) x 45 (H) x 43.5 (D) mm	45 (W) x 45 (H) x 51.5 (D) mm	45 (W) x 45 (H) x 43.5 (D) mm	45 (W) x 45 (H) x 51.5 (D) mm	
	Lens mount	C mount				
	Weight	Approximately 45 g				
Environmental Specifications	Operational temperature	0 to 40 deg. C				
	Storage temperature	-30 to 65 deg. C				
	RoHS	RoHS compliance				

(Caution)


Please DO NOT connects or disconnect any USB devices including USB memory while use this USB camera.
Its possibility to the USB camera DOES NOT recognize after connect or disconnect USB devices.

Spectral Sensitivity Characteristics


STC-TB152USB-AT/AS/BT/BS

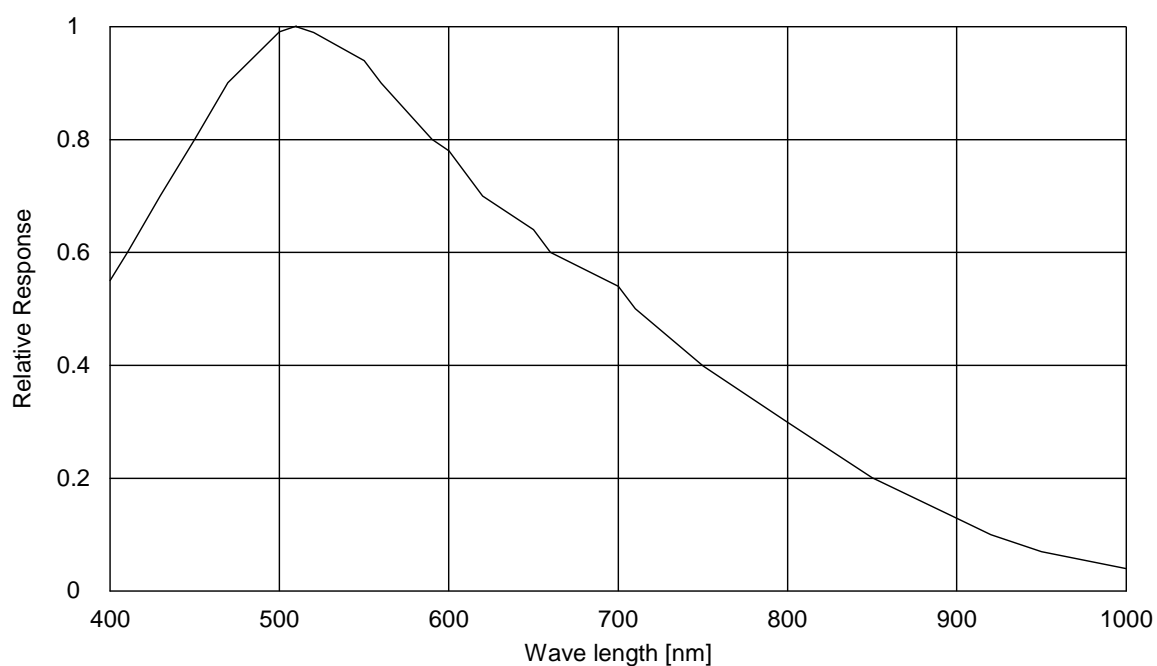


STC-TC152USB-AT/AS/BT/BS (with IR cut filter)

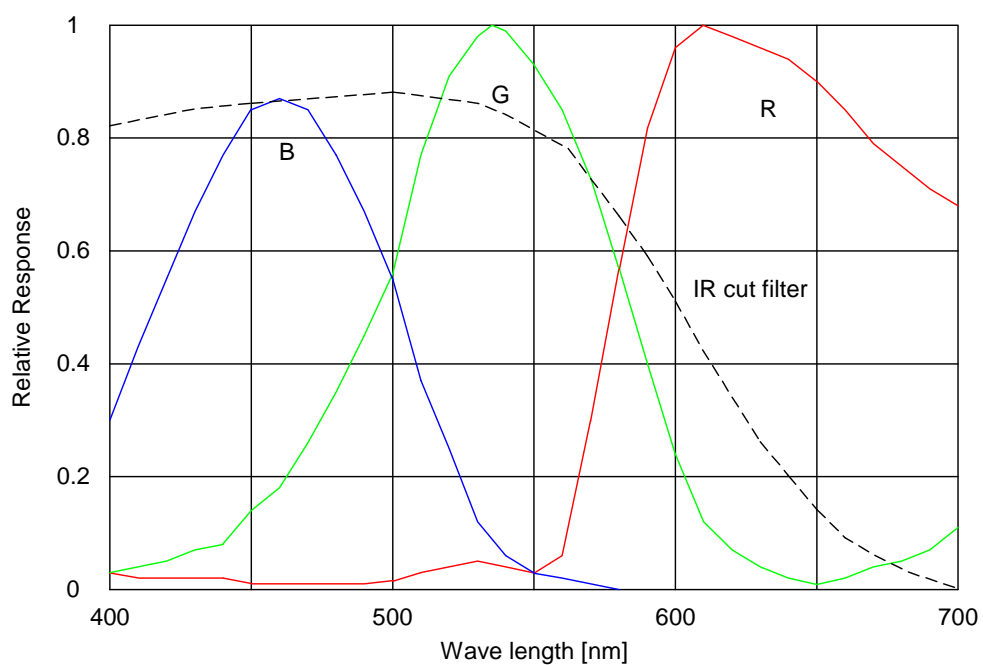

Connector specifications (Board type)

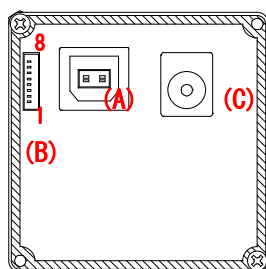

Straight type

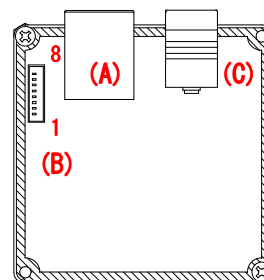

Right-angle type

- A USB Connector
Please connect the USB cable to this connector.
- B Input / output signal connector: BM08B-SRSS-TB (JST)
Pin assignment

No.	Signal	I/O
1	+5V DC	
2	GND	
3	N.C.	
4	N.C.	
5	IO0	IN
6	IO1	IN
7	IO2	OUT
8	IO3	OUT

- C 5V power jack
The external power supply is necessary depends on the system.
Please supply 5V to this connector when the external power supply uses.


Input / Output Signals specifications (Board type)

A. Input signals specifications

Input signal pins (IO 0 and IO1) can be configured with “Trigger Input” or “Readout Request” through the software.


a. Trigger input signal requirements

- | | |
|------------------------|--|
| 1. Input signal level: | High: 2.5 to 5 V
Low : 0 to 0.3 V |
| 2. Input impedance: | 10 k Ohm |
| 3. Pulse polarity: | Positive or Negative (selectable by the software) |
| 4. Pulse width: | 50 clock to 0.5 seconds
Normal clock: 1.35803 useconds to 0.5 seconds
1/2 clock: 2.71607 useconds to 0.5 seconds
1/4 clock: 5.43210 useconds to 0.5 seconds |

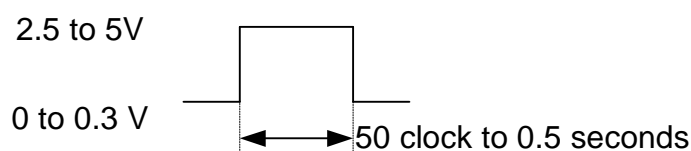

b. Read out request input signal requirements

- | | |
|------------------------|--|
| 1. Input signal level: | High: 2.5 to 5 V
Low : 0 to 0.3 V |
| 2. Input impedance: | 10 k Ohm |
| 3. Pulse polarity: | Positive or Negative (selectable by the software) |
| 4. Pulse width: | 50 clock to 0.5 seconds
Normal clock: 1.35803 useconds to 0.5 seconds
1/2 clock: 2.71607 useconds to 0.5 seconds
1/4 clock: 5.43210 useconds to 0.5 seconds |

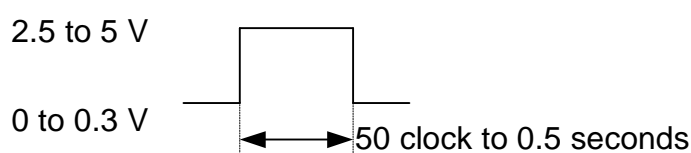


B. Output signals specifications

Output signal pins (IO2 and IO3) can be configured with “Strobe signal output”, “Trigger output”, “End of exposure” or “End of Transfer” through the software.


a. Strobe (Exposure time) output signal specifications

1. Output signal level: 3.3 Vp-p
2. Output impedance: High-impedance
3. Pulse polarity: Positive or Negative (selectable by the software)
4. Pulse width: Exposure time

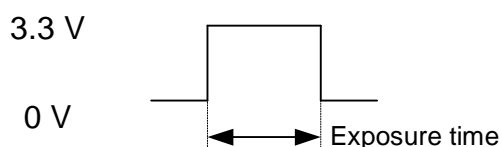


b. Strobe (strobe signal setting) output signal specifications

1. Output signal level: 3.3 Vp-p
2. Output impedance: High-impedance
3. Pulse polarity: Positive or Negative (selectable by the software)
4. Pulse width: Exposure time + setting time

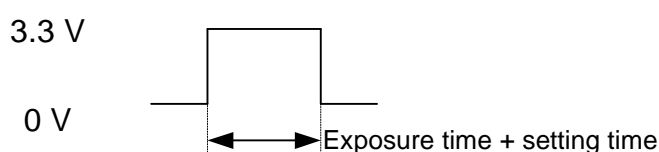


c. Trigger (through) output signal specifications

1. Output signal level: 3.3 Vp-p
2. Output impedance: High-impedance
3. Pulse polarity: Positive or Negative (selectable by the software)
4. Pulse width: As same as input trigger signal

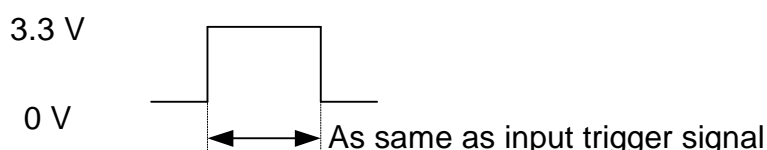


d. Trigger output signal specifications

1. Output signal level: 3.3 Vp-p
2. Output impedance: High-impedance
3. Pulse polarity: Positive or Negative (selectable by the software)
4. Pulse width:
1 clock to 4094 clocks (selectable by the software)
Normal clock: 27.1606 nseconds to 111.196 useconds
1/2 clock: 54.3213 nseconds to 222.391 useconds
1/4 clock: 108.642 nseconds to 444.780 useconds

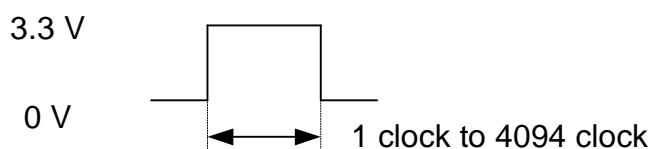


e. End of exposure output signal specifications

1. Output signal level: 3.3 Vp-p
2. Output impedance: High-impedance
3. Pulse polarity: Positive or Negative (selectable by the software)
4. Pulse width:
1 clock to 4094 clocks (selectable by the software)
Normal clock: 27.1606 nseconds to 111.196 useconds
1/2 clock: 54.3213 nseconds to 222.391 useconds
1/4 clock: 108.642 nseconds to 444.780 useconds

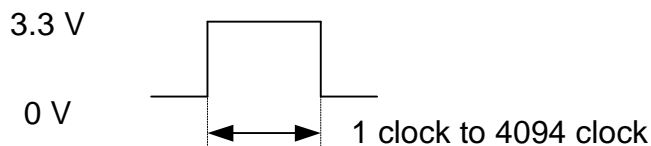


f. End of transfer output signal specifications

1. Output signal level: 3.3 Vp-p
2. Output impedance: High-impedance
3. Pulse polarity: Positive or Negative (selectable by the software)
4. Pulse width:
1 clock to 4094 clocks (selectable by the software)
Normal clock: 27.1606 nseconds to 111.196 useconds
1/2 clock: 54.3213 nseconds to 222.391 useconds
1/4 clock: 108.642 nseconds to 444.780 useconds

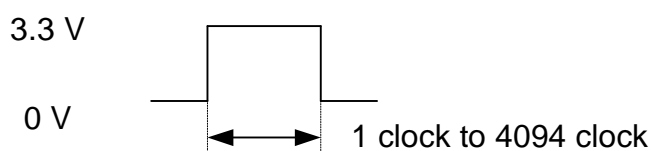


C. IO circuits

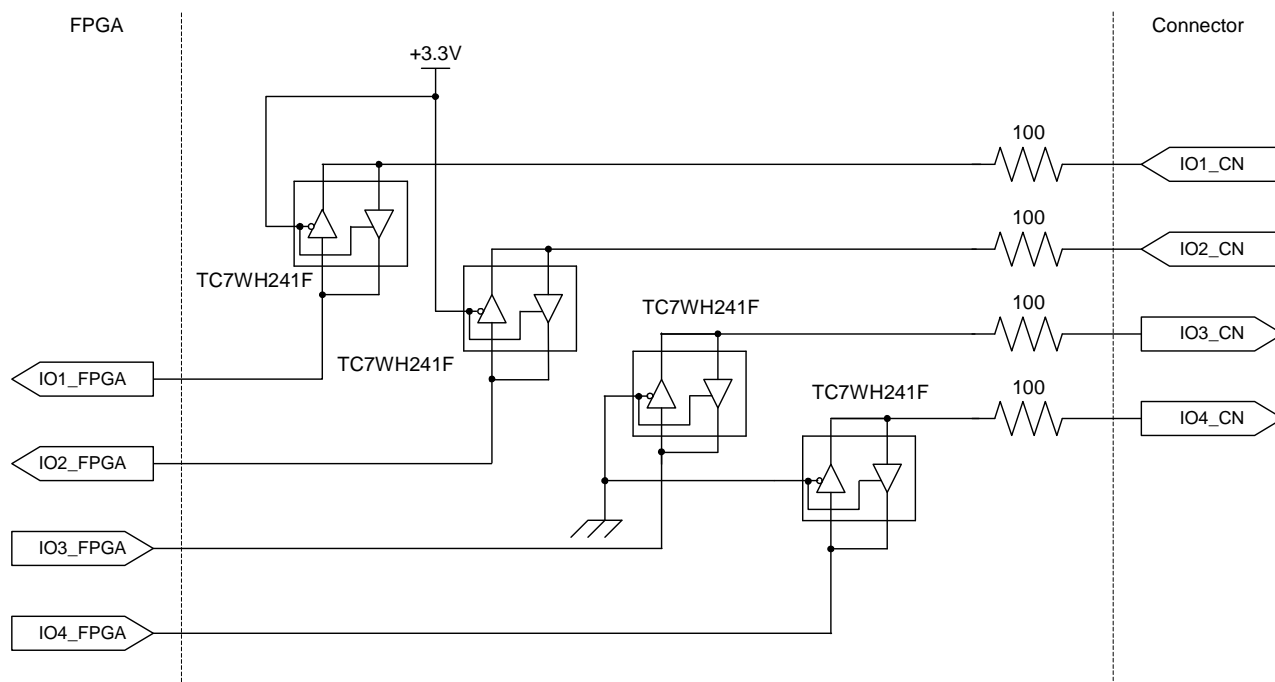


Dimensions

Dimensions (STC-TC152USB-AT: Color / right-angle / case type)

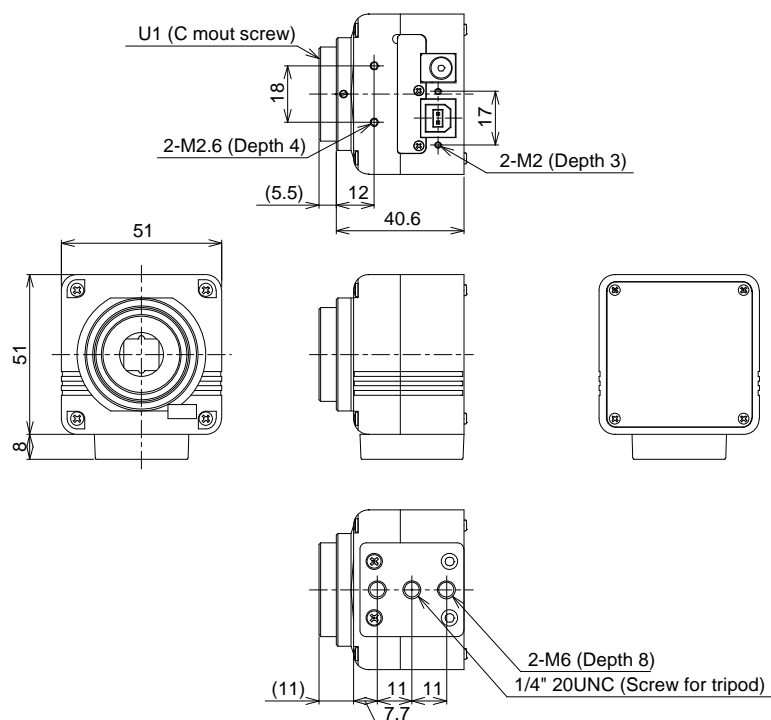


Unit: mm

Dimensions (STC-TC152USB-AS: Color / straight / case type)

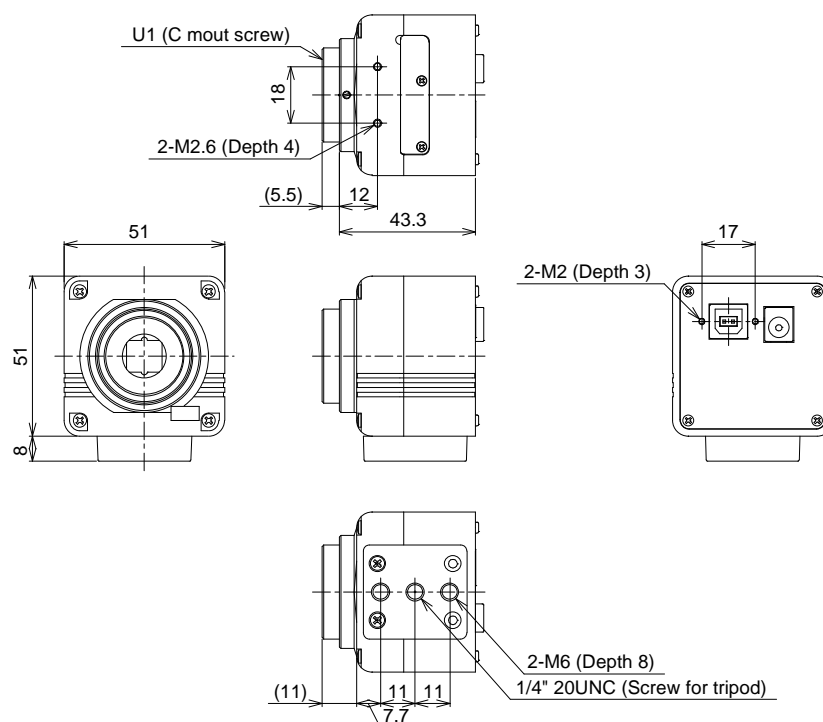


Unit: mm

Dimensions (STC-TC152USB-BTC: Color / right-angle / C mount / board type)

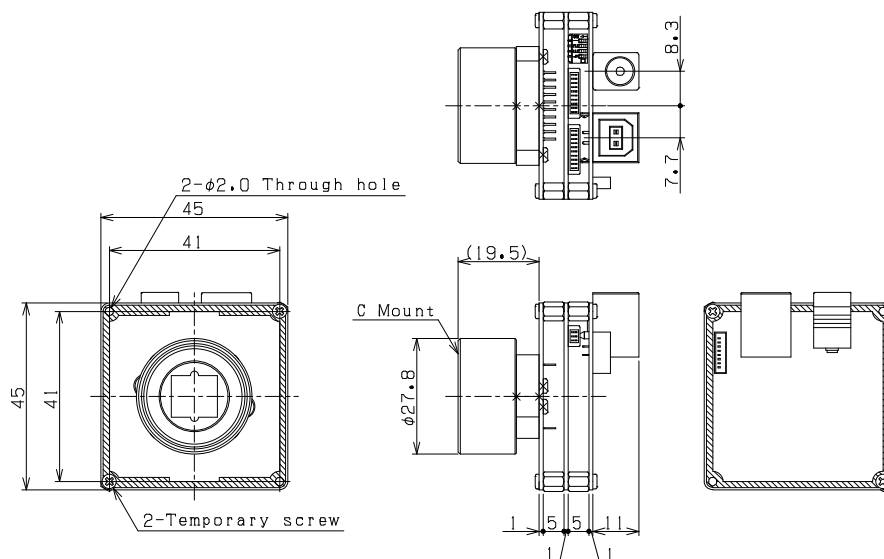


Unit: mm

Dimensions (STC-TC152USB-BSC: Color / straight / C mount / board type)

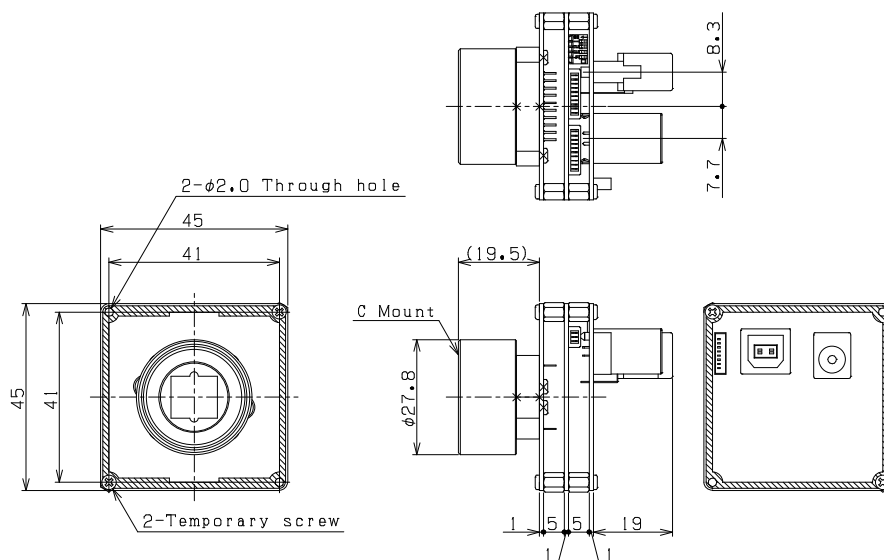


Unit: mm

Dimensions (STC-TB152USB-AT: Monochrome / right-angle / case type)

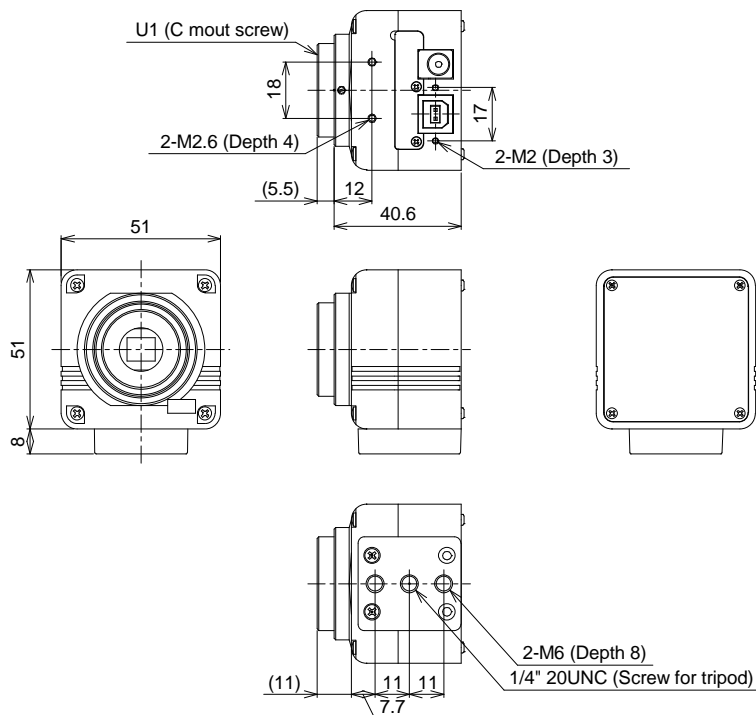


Unit: mm

Dimensions (STC-TB152USB-AS: Monochrome / straight / case type)

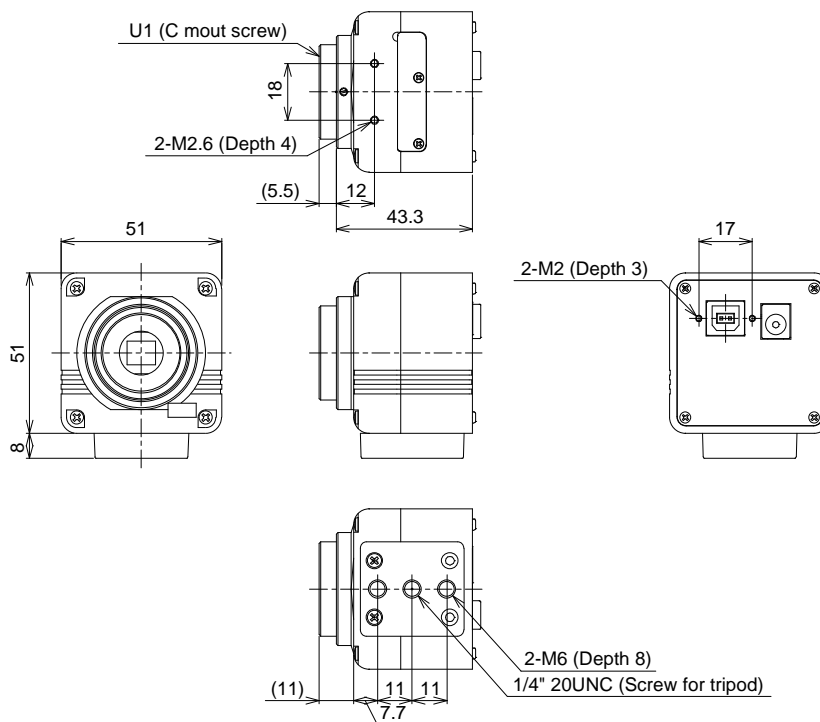


Unit: mm

Dimensions (STC-TB152USB-BTC: Monochrome / right-angle / C mount / board type)

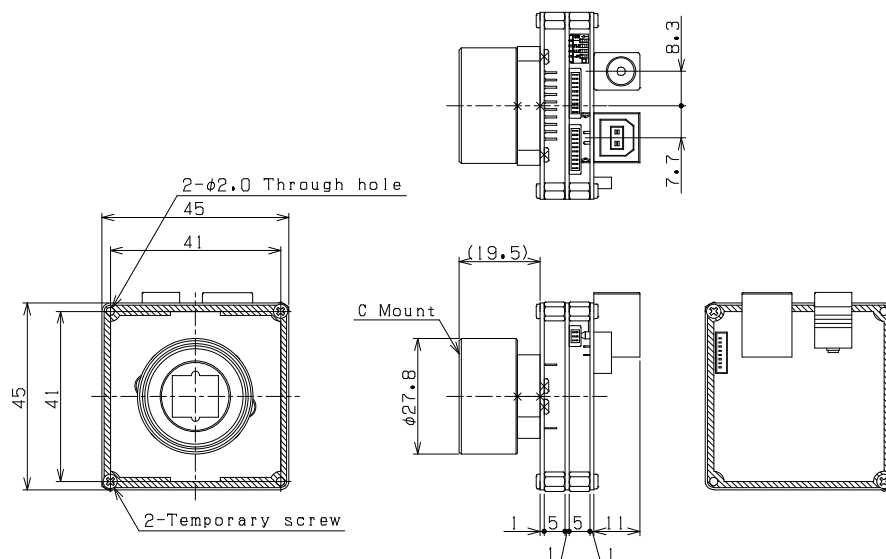

Unit: mm

Dimensions (STC-TB152USB-BSC: Monochrome / straight / C mount / board type)

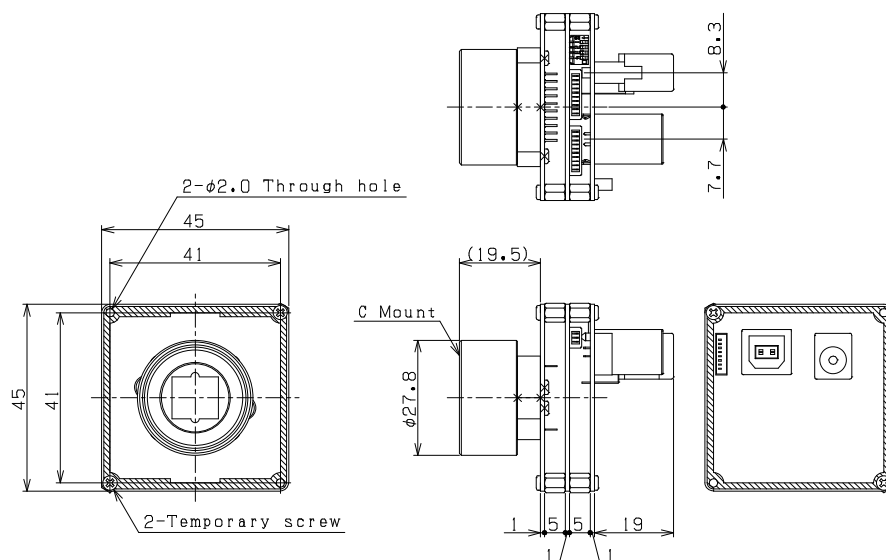

Unit: mm

7F, Harada center building
9-17, Naka cho 4 chome
Atsugi-city, Kanagawa
243-0018 Japan

Sensor Technology Co., Ltd

TEL +81-46-295-7061 FAX +81-46-295-7066
URL <http://www.sentech.co.jp/>